Technical data sheet

HOMEline parquet flooring SB

Wooden floors ship deck

Ship deck 3-strip, Natural grading



Article number(s):	E3701

Grading description	
Sapwood	Permitted
Silver figure / rays	Permitted
Vein / vertical growth rings	Permitted
Colour differences	Colour differences between the top layers within the context of the wood type
Intergrown knots	In the colour of the wood up to 30 mm in diameter
Filled knots	Sporadically up to maximum 25 mm diameter
Knot holes	Filled, with a diameter up to 15 mm maximum
Filled cracks	Filled cracks up to 1 mm wide and up to 30 mm long
Surface layer joints	None
Bark pocket	Permitted

08|2022

Information subject to technical modifications and error. All previous data sheets are no longer valid on publication of this edition.

INKU Jordan GmbH & Co. KG | IZ-NÖ Süd | Straße 3 | A-2355 Wiener Neudorf | info@inku.at | www.inku.at

Technical data sheet

HOMEline parquet flooring SB

Wooden floors ship deck

Ship deck 3-strip, Country grading



Article number(s):	E7701

Grading description	
Sapwood	Permitted
Silver figure / rays	Permitted
Vein / vertical growth rings	Permitted
Colour differences	Clear colour differences and discolouring permissible
Intergrown knots	Permitted
Filled knots	Up to maximum 55 mm diameter
Knot holes	Filled, up to 25 mm diameter
Filled cracks	Filled cracks up to 1 mm wide and up to 30 mm long
Surface layer joints	None
Bark pocket	Permitted

08|2022

Information subject to technical modifications and error. All previous data sheets are no longer valid on publication of this edition.

INKU Jordan GmbH & Co. KG | IZ-NÖ Süd | Straße 3 | A-2355 Wiener Neudorf | info@inku.at | www.inku.at

Technical data sheet

HOMEline parquet flooring SB

Wooden floors ship deck

Despite careful quality controls, up to 3 % of the strips in a lot can come from a different grade. (EN 13489)

Material / Construction	
Top layer	3.2 mm fine wood + 0.2 mm possible
Middle layer	8.2 mm spruce/pine base material; plywood in the head area
Backing	2.6 mm pine backing
Surface appearance	3-strip ship deck, chamfer V2 on the long side
Surface treatment	Velvet matt (varnished ready for use)
Connection system	ProConnect 5G installation system
Installation possibilities	floating installation or full adhesive bonding

Dimensions and tolerances in accordance with EN 13489. Dimensional characteristics and permitted dimensional deviations, which have been determined in the factory, have been given in accordance with the type of elements for multi-

Dimensions and tolerances of the individual element	
Thickness	14 mm
Length	2200 mm
Width	207 mm
Permitted deviation of the width	± 0.2 mm
Permitted deviation of the squareness	≤ 0.2 % across the width
Edge bend (along the element)	≤ 0.1 %
Cup (along the element)	≤ 0.2 % across the width
Vertical offset (lipping)	≤ 0.2 mm between the elements

* One short length or up to 2 half-boards permitted per pack

Product characteristics	
Moisture content	5 - 9 % at the time of first delivery to EN 13489
Reaction to fire	D_{fl} s1
Formaldehyde	E1
Pentachlorophenol content	< 5 ppm
Thermal resistance	approx. 0.1 m²*K/W suitability on hot water underfloor heating. The surface temperature must not exceed 29°C.
Thermal conductivity	≥ 0.15 W/(m*K)
Chair castor load	No change when chair castors of type W are used
Sorting specifications	Requirements are fulfilled by factory standard
Biological durability	Class 1
Slip resistance	R9

08 | 2022

Information subject to technical modifications and error. All previous data sheets are no longer valid on publication of this edition.

INKU Jordan GmbH & Co. KG | IZ-NÖ Süd | Straße 3 | A-2355 Wiener Neudorf | info@inku.at | www.inku.at

Technical data sheet

HOMEline parquet flooring LD

Wooden floors rustic boards

Adhesive recommendation

Manufacturer	Adhesive	Toothing	Consumption
JOKA	JK24	TKB B11	approx. 1,000 - 1,200 g/m²
Mapei	Ultrabond ECO S968	TKB B11	approx. 1,000 - 1,200 g/m²
Schönox	Parquet 400	TKB B11	approx. 1,000 - 1,200 g/m²
Uzin	MK 250	TKB B11	approx. 1,000 - 1,200 g/m²

Packaging

Contents (area) per pack	3.18 m²
Contents per pallet	127.20 m²
Number of boards per pack	7 boards (up to 2 half-lengths per pack possible)
Packs per pallet	40 packs


General product data

DoP number	PAR1501650-BA307

NOTE

Wood is a natural product and its colour and texture can therefore differ. Samples, brochures and photos are therefore only approximate and are not binding. The action of sunlight also influences the natural change in wood colour. As a result, the product at the time of delivery can have clear differences to the sample provided.

Certificates:

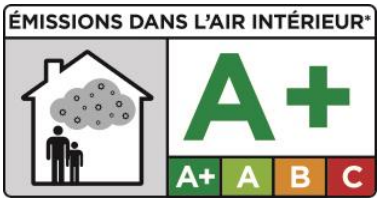



Information subject to technical modifications and error. All previous data sheets are no longer valid on publication of this edition.

INKU Jordan GmbH & Co. KG | IZ-NÖ Süd | Straße 3 | A-2355 Wiener Neudorf | info@inku.at | www.inku.at